

Key Features

- ▶ THX certified dipolar ambient loudspeaker.
- ▶ (2) 0.75" titanium compression drivers.
- ▶ (2) Bi-radial horns - 100 degrees vertical, 60 degrees horizontal.
- ▶ (2) 5" Poron-fiber-cone, cast-frame woofers.
- ▶ Vertical orientation.
- ▶ Easily placed inside columns, on walls or ceilings.
- ▶ Wrap-around 3 piece grille.

Description

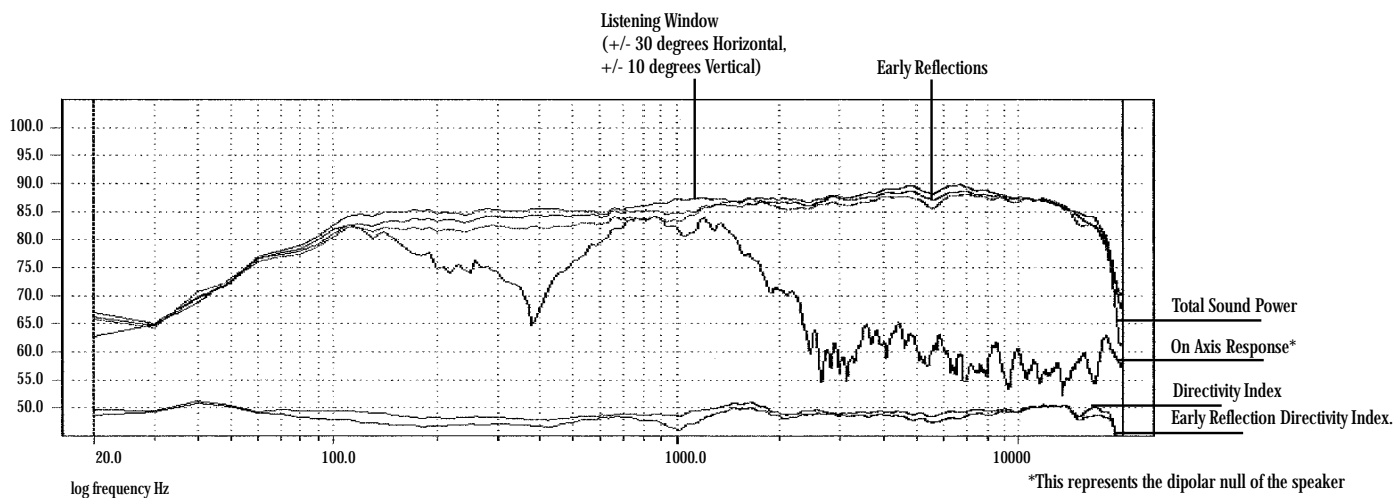
- ▶ Synthesis 2 and 3 ambient loudspeaker.

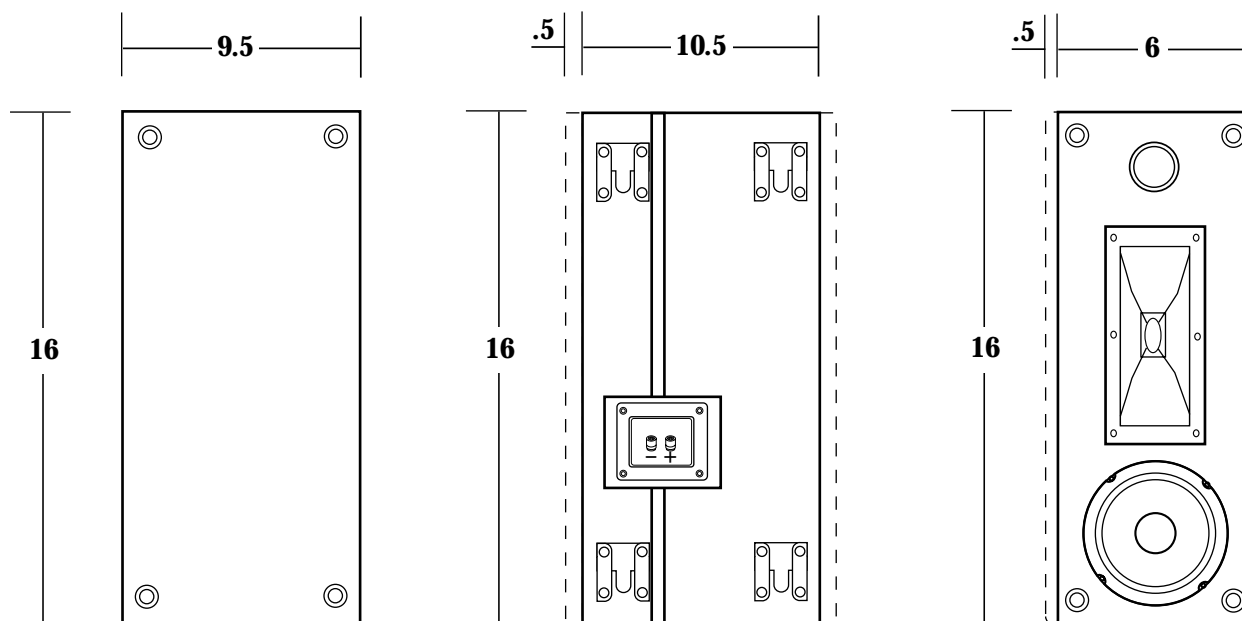
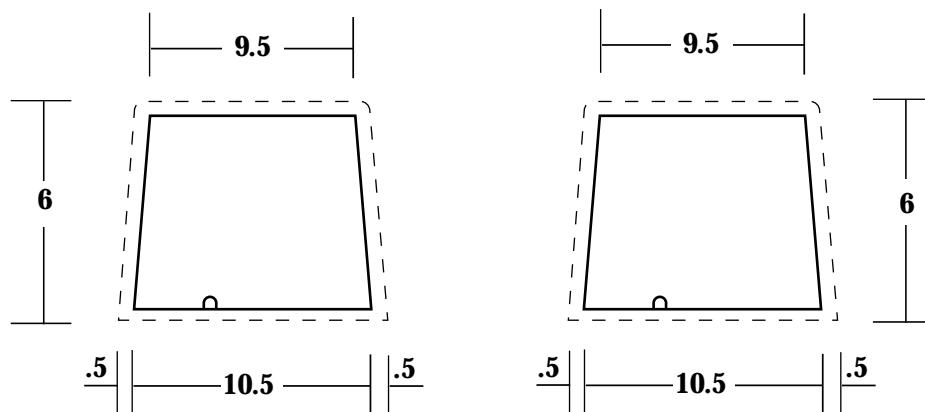
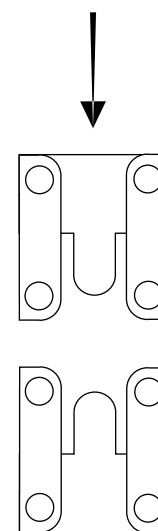


Specifications

Frequency Response	100 Hz - 17 kHz
Sensitivity	87 dB (1 watt @ 1 meter)
Recommended Maximum Amplifier Power	150 Watts
Nominal Impedance	6 Ohms
High Frequency Transducer	.75 Titanium Compression Driver
Crossover Frequency	3000 Hz
Low Frequency Transducer	5" Polymer Laminate
Weight	32 lbs. /14.5 kg.
Dimensions (H x W x D)	16" x 11.56" x 6.53"
	406mm x 294mm x 166mm

Frequency Response



**Front****Back****Side****Top****Footprint****Two Piece
Mounting Bracket**

All measurements in inches